


## N.B.S. FORMAT SPECIFICATION - 1UL/DI

<b>Company Details</b>	ALPS Limited Unit 3, 12 Downley Road Havant Hampshire PO9 2NJ  Tel: 02392 480055 Email: sales@alpslouvres.co.uk
<b>Product Reference</b>	Universal Louvre Deep Inverted Type 1UL/DI
<b>Material</b>	All principal components manufactured from aluminium alloy type 3005 (Colterra).
<b>Blade pitch and angle</b>	100mm pitch @ 45 degrees in the inverted position
<b>Number of louvre banks</b>	1 (Single bank)
<b>Special Features</b>	Louvre blades shall be roll formed to an aerodynamically efficient profile and clipped to concealed structural supporting mullions. The system shall achieve a minimum aerodynamic performance coefficient (CV) of 0.435 (inlet) with bird guard fitted to the rear.  HEVAC Weathering Classification Class D
<b>Decorative Finish</b>	Mill finish (unpainted), polyester powder coating, natural or colour anodised.
<b>Coverage</b>	Partial (external components painted) or Total (all principle components painted)
<b>Accessories</b>	Bird Guards / Insect Mesh / Blanking Panel / Insulated Blanking Panel / Mitred Corners / Louvred Doors.
<b>Alternative Materials</b>	Galvanised Mild Steel or Stainless Steel

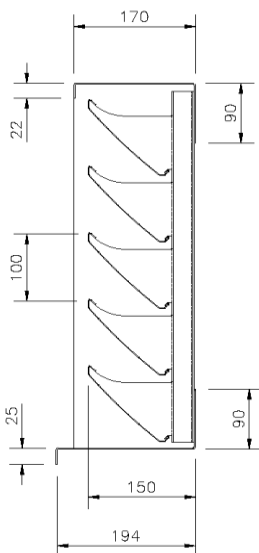

© Architectural Louvre Products & Services Limited 2016